


AIR CONDITIONING



Managing condensate

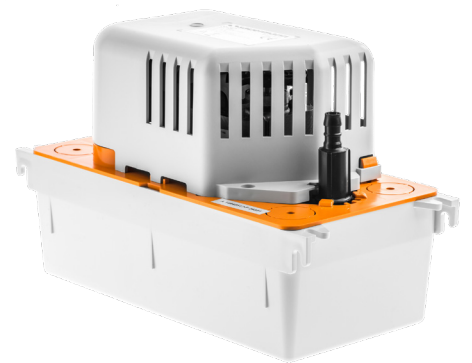

Pump selection chart

Condensate Pump Finder

The Right Pump is Just Clicks Away














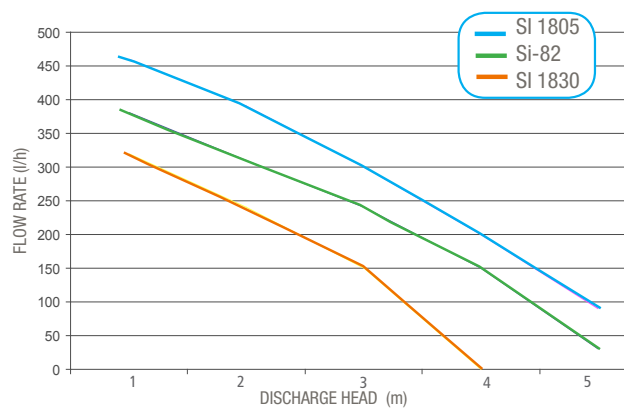
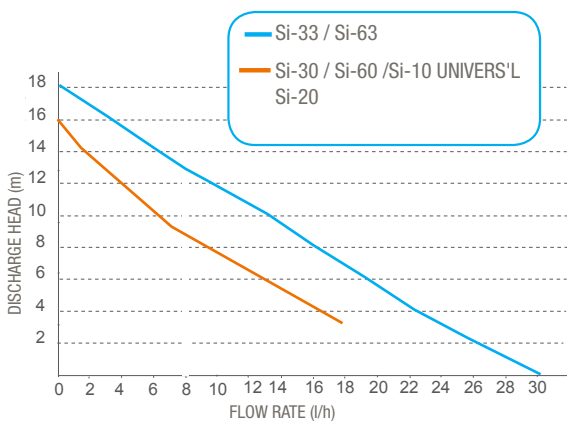



	Image	Model	Equipment						Location					
			Wall mounted	Cassette	Multi cassette	Conditioning cabinet	Floor standing	Ducted unit	Suspended ceiling unit	Inside the unit	Inside ducting	Wall mounted	Floor mounted	False ceiling
p.3		OMEGA PACK	x									x		
p.3		Si-20	x						x	x				
p.4		DELTA PACK	x											
p.4		Si-10 UNIVERS'L		x			x		x	x				x
p.5		Si-30 Si-33	x				x		x					x
p.6		Si-60				x	x	x		x				x
p.7		Si-82			x	x			x			x	x	
p.8		SI 1805				x			x			x	x	
p.8		SI 1830			x	x		x	x	x		x	x	
p.9		SI 2052		x					x	x	x			
p.10		PE5000 PE5100 PE5200	x	x										x

Actual flow rates



OMEGA PACK


The under the unit pack

For mini-split air conditioning

Ref :

RAL 9010 : OP20CE01UN23

RAL 9003 : OP20CE02UN23

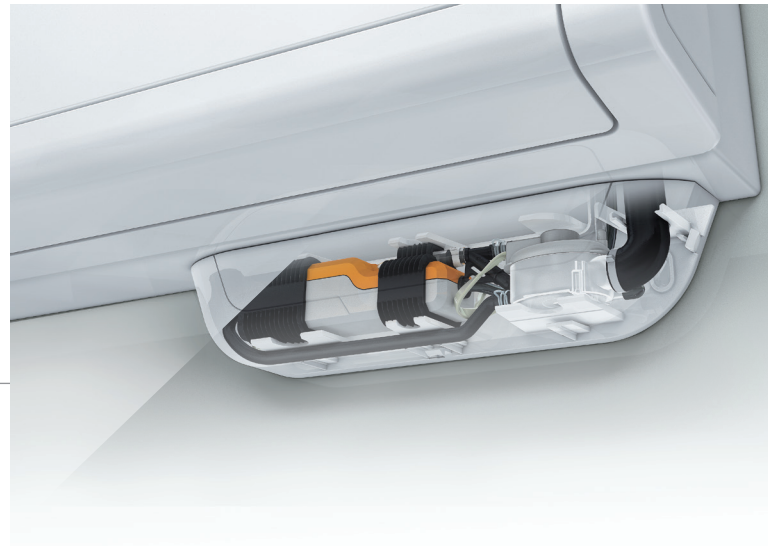

Easy installation

Complete installation kit with pre-mounted pieces.



Reliability

The Drain Safe Device included to prolong the life of the pump.



Operation level

Anti-vibration rubber dampers.



Installation video


Kit contents

Si-20 piston pump with detection unit (0.63 m cable), 2 anti-vibration rubber dampers, clear pvc tubing int. Ø 6 mm fitted with a drain safe device - Power cable 1.5m (2 power wires, 2 safety wires)- Shell (2-part: backplate & cover) - Screws & plugs for affixing backplate 90° rubber elbow Ø int.15 mm x L 152 mm - Vent tube - 3 Double Wire Clamps - 3 Tie Wraps.

Piston pump

For wall mounted and floor standing units

Ref : SI20CE01UN23

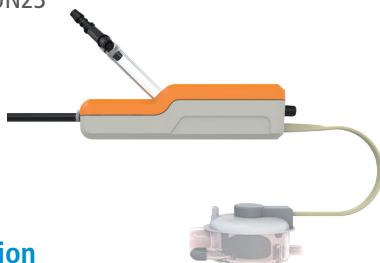

Easy installation

Slim design. Rubber damper : allows the pump to be put directly inside the unit.

Installation video



Technical specifications

	Si-20
Maximum flow-rate	20 l/h
Maximum discharge head	10 m (flow rate= 4 l/h)
Pump sound level @ 1 m	22 dBA
Detection levels (mm)	ON : 16, OFF: 11, Safety : 19
Mains supply	230 V ~ 50 Hz 14 W
Thermal protection	115°C (auto-reset)
Protection	IP20

*To EN ISO 3744. LNE measurement, on pump running with water, out of application.

DELTA PACK

Piston pump and trunking system

For wall-mounted air-conditioning units

Ref : 80X50 mm white RAL 9010 : DP10CE01UN23
 80x60 mm cream RAL 9001 : DP10CE02UN23
 80x60 mm white RAL 9003 : DP10CE04UN23



Complete system

Pump and trunking kit for a quick and easy solution.



Multiple choice

80x50mm or 80x60mm, white or cream. Can be mounted to either side of the air conditioning unit.



Operation level

High energy absorbing foam inside the elbow, anti-vibration insulation.



Installation video


Kit contents : Si-10 UNIVERS'L pump – 1 m long discharge pipe with foam insulation and "Drain-Safe Device" connector - Lockable, plug-in 1.5 m cable with NC safety contact wire – 2-part elbow (base and cover) – 750 mm duct with Elbow/Duct and Elbow/ Split joiners - Ceiling fitting - 0.5 m long flexible hose for connection to split - Vent pipe - 6 fixing plugs and screws - 2 hose clips.

SI-10 UNIVERS'L

Replacement pump for trunking corner pieces

For wall-mounted air-conditioning units

Ref : SI10CE03UN23



Universal

Replacement pump for the majority of pump in trunking systems.



Technical specifications

	SI- 10 UNIVERS'L
Maximum flow-rate	20 l/h
Maximum discharge head	10 m (flow rate= 4 l/h)
Pump sound level @ 1 m	22 dBA
Detection levels (mm)	ON: 16, OFF: 11, Safety : 19
Mains supply	230 V ~ 50 Hz 14 W
Thermal protection	115°C (auto-reset)
Protection	IPX4

*at 1m according to EN ISO3744

Si-30 / Si-33

Mini pumps with float detection

For air conditioning systems

Ref : SI30 : SI30CE01UN23 / Si-33 : SI33CE01UN23



Manufactured for purpose

The patented Sauermann technology is designed specifically for discharging contaminated condensates produced by air-conditioning systems. 100% operating cycle.



Reliable

No risk of siphoning, due to the pre-installed Drain-Safe Device.



Versatile installation

The three way mounting bracket gives the installer flexibility when siting the pump and can be fixed to the wall, pipework or ceiling suspended.



Installation video

Kit contents

Pump - Transparent PVC tube int. Ø 6 mm L 1 m, fitted with "Drain-Safe Device" connector - Anti-vibration mounting bracket - Lockable, plug-in 1.5 m cable with NC safety contact wire - 6 cable ties - Detection block (SI 2958) with installation kit: 90° connector int. Ø 15 mm × L 60 mm, vent pipe, mounting rail, adhesive.

Si-30 Detect+

High performance pump and electronic detection unit

Ref : SI30CE04UN23



Double Patented:
Piston technology and probes system



Resistant to particles

Si-30 : can replace SI3080, SI3100, SI3200
Si-33 : can replace SI1730

Technical specifications

	Si-30	Si-33
Maximum flow-rate	20 l/h	30 l/h
Maximum suction height	3 m	4 m
Maximum discharge head	10 m (flow rate = 4 l/h)	> 13 m (flow rate = 8 l/h)
Pump sound level @ 1 m	20 dBA	34 dBA
Detection levels (mm)	ON : 16, OFF: 11, Safety : 19	
Mains supply	230 V ~ 50 Hz 14 W	230 V ~ 50 Hz 21 W
Protection	IP20	

*To EN ISO 3744. LNE measurement, on pump running with water, out of application.

Si-60 / Si-63

Piston pump with 0.37 L tank

For ducted air conditioning systems

Ref : SI60CE01UN23



Lockable cable

Twist lock power cable for a secure connection



Innovative detection

Intergrated float detection system reliable in all types of environment.



Multi Purpose

Top and bottom inlet. Can be semi-submersed in a condensate drain pan.



Kit contents

Pump - Lockable, plug-in 1.5 m cable with NC safety contact wire - Installation kit: adapter int. Ø 15-20-24-32-40 mm, rubber 90° connector int. Ø 15 mm × L 60 mm, plastic 90° connector for 6 mm int. Ø flexible tube, 1 off 2.5 × 100 mm cable tie.

Technical specifications

	Si-60
Maximum flow-rate	20 l/h
Maximum discharge head	10 m (flow rate = 4 l/h)
Pump sound level @ 1 m	< 38 dBA
Detection levels (mm)	ON : 28, OFF : 24, Safety : 35
Mains supply	230 V ~ 50 Hz 14 W
Protection	IPX4

* To EN ISO 3744. LNE measurement, on pump running with water, out of application.

PE 5000 / PE 5100 PE 5200

Peristaltic pumps

For air conditioning applications up to 8 kW

Ref : PE5000 : PE5000SIUN23
PE5100 : PE5100SIUN23
PE5200 : PE5200SIUN23




PE 5000



PE 5100



PE 5200



Easy maintenance

Quick fit replacement head and tubes.



3 detection systems

PE 5000 : compressor signal

PE 5100 : temperature differential sensors

PE 5200 : float detection unit

Kit contents

Pump - Cable: 1.7 m, including 2 wires for power supply (P &N), 1 wire for compressor signal - Easy «1 screw» sliding plastic bracket - Ø 15 mm to Ø 6 mm adaptor + pale yellow rubber Ø 15 x 35mm (PE5003)

Additional kit for PE 5100 : 2 thermal probes with 3.5m cable:
Red cap for ambient air. Blue cap for fresh air.

Additional kit for PE 5200 : detection unit (SI2958, 1.5m cable)
- Detection unit installation kit : Pale yellow rubber (Ø 15 x 35mm). Vent tube Øint 4 x L 75 mm. Mounting rail. Adhesive.

Technical specifications

	PE 5000 / PE 5100 / PE 5200
Maximum flow-rate	6 l/h
Maximum discharge head	2 m
Pump sound level @ 1 m	≤ 30 dBA
Detection levels (mm)	ON : 16, OFF: 11, Safety: 19
Mains supply	230 V~ 50/60 Hz -75 W
Protection	IP65


* To EN ISO 3744. LNE measurement, on pump running with water, out of application.

Si-82

Centrifugal pump with 2 l tank

For cassette and fan coil air-conditioning systems.

Ref : SI82CE01UN23

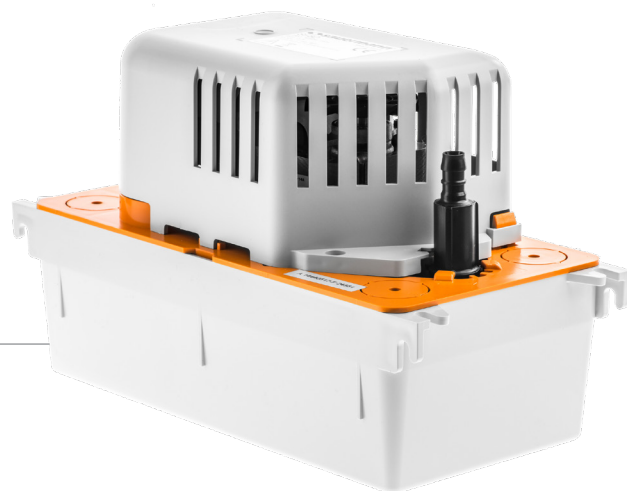

Plug in power cable

Easy to maintain and replace.



Versatile installation

Provides installer flexibility when fitting the pump. Can be fixed to the wall, flat surface or ceiling suspended.



Easy hydraulic connection

4 inlet holes Ø 30 mm. Reversible tank.



Kit contents

One-piece centrifugal pump - Tank (2 l) - Built-in 10 mm ext. Ø non-return valve - Plug-in cable: power (2 m, European IEC socket) and safety contact (1.5 m, bared wires) – Straight connector ext. Ø 10 mm / ext. Ø 6 mm; 2 plugs + 2 screws.

Technical specifications

	Si-82
Maximum flow-rate	500 l/h
Maximum discharge head	5 m (flow rate 50l/h)
Pump sound level @ 1 m	< 45 dBA
Detection levels (mm)	ON : 53, OFF : 42, Safety: 64
Mains supply	230 V ~ 50/60 Hz - 70 W
Protection	IP20

* To EN ISO 3744. LNE measurement, on pump running with water, out of application.


SI 1805 / SI 1830

Centrifugal pumps with 0.5 l tank

For cassette and fan coil air-conditioning systems

Ref : SI 1805 : SI1805SIUN23

SI 1830 : SI1830SCUN23

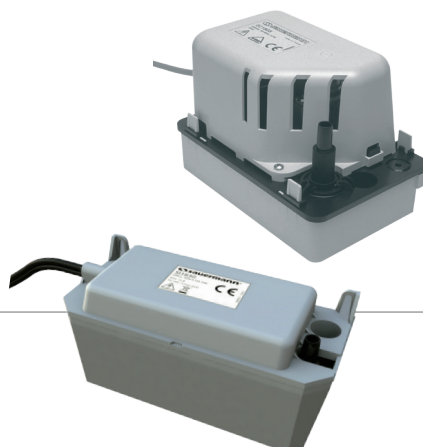

High performance

Capable of discharging high volume of condensates evacuated per hour.



Compact

Compact design that can be sited in confined spaces.



Installation in any location

SI 1805 : compact design
SI 1830 : can be installed without the tank.



Kit contents

SI 1805 : Pump - 2 screws - 2 plugs – Power cable: 2 m, European IEC plug; safety contact cable: 1 m, 2 wires (NC contact).

SI 1830 : Pump with 0.5 l tank – Power cable: 1.5 m, European IEC plug; safety contact cable: 1 m, 2 wires (NC contact) - Installation kit: 2 screws + 2 plugs, 5 m of transparent PVC hose 10 mm int. Ø, flexible adapter 15-24-32-40 mm Ø.

Dimensions

SI 1805 : L 195 x W 130 x H 132 mm

SI 1830 : L 190 x W 80 x H 100 mm

Technical specifications

	SI 1805	SI 1830
Maximum flow-rate	500 l/h	400 l/h
Maximum discharge head	5,4m	3,7 m
Pump sound level @ 1 m	≤ 47 dBA	≤ 43 dBA
Detection levels (mm)	ON : 27, OFF: 21, Safety : 32	ON : 32, OFF : 25, Safety: 39
Mains supply	230 V~ 50/60 Hz -90 W	230 V~ 50/60 Hz -75 W
Protection	IP20	IPX4

* To EN ISO 3744. LNE measurement, on pump running with water, out of application.

SI-2052

Centrifugal lift pump

For cassette air conditioning systems

Ref : SI2052SIUN23




Replacement

Can be used as a replacement pump for most cassette systems.



Kit contents

Centrifugal pump – 250 mm overmoulded cable – 850 mm cable with hard-wired connector - Detector (DET01550, 900 mm cable) + stainless-steel fixing screw.

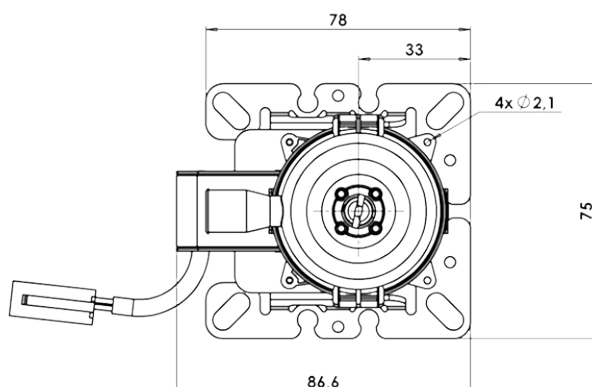


Technical specifications

SI 2052

Maximum flow-rate	100 l/h at 200mm
Maximum discharge head	0.9 m (24l/h)
Pump sound level @ 1 m	≤ 30 dBA
Detection levels (mm)	Safety : 18
Mains supply	230 V ~ 50/60 Hz - 14 W

* To EN ISO 3744. LNE measurement, on pump running with water, out of application.

ACCESSORIES

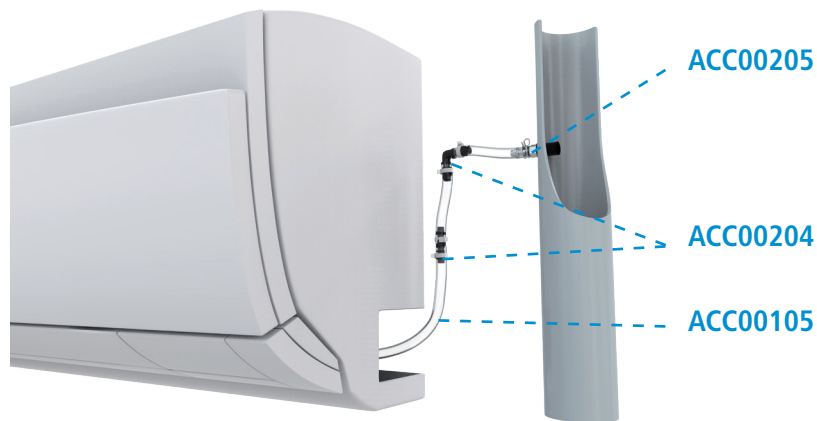

Pump Discharge Hoses



Double wire clamp

This double wire clamps are used to ensure safe connection between connectors and clear PVC tube
 ACC000912 : for clear PVC tube Ø 6 mm (1/4") ACC000916 : for braided PVC tube Ø 6 mm (1/4")
 ACC000913 : for clear PVC tube Ø 10 mm (3/8") ACC000917 : for braided PVC tube Ø 10 mm (3/8")



Pump Discharge Hose Ø 6 mm

ACC00909 : 5 m - ACC00910 : 50 m - ACC00914 : reinforced, 50 m
 Clear PVC tubing for connecting the pump to the discharge outlet i.d. 6 mm (1/4")



Pump Discharge Hose Ø 10 mm

ACC00911 : 25 m - ACC00915 : reinforced, 25 m
 Clear PVC tubing for connecting the pump to the discharge outlet i.d. 10 mm (3/8")

Connectors



Straight connectors

ACC00901 : for Ø 6 mm hose - ACC00902 : for Ø 10 mm hose
 Straight and elbow connectors for connecting hoses together.



Elbow connectors

ACC00904 : for Ø 6 mm hose - ACC00905 : for Ø 10 mm hose
 Straight and elbow connectors for connecting hoses together. 5 straight, and 5 elbow connector pieces per package.



«T» Connector

ACC00902 : Ø 6 mm ACC00903 : Ø 10 mm
 To make the connection between 3 tubes.



Self Sealing Fittings

ACC00919 : for use with Ø 6 mm tubing ACC00920 : for use with Ø 10 mm tubing.
 Self sealing fittings for condensate discharge tubing.

Spare Parts



Detection unit

SI2958-003
 For replacing the detection unit when necessary
 Inlet : Ø 15mm int. Outlet : Ø 6 mm int. (1/4"). For pumps with detection unit.



Non-return valve

ACC00925
 For replacing the non-return valve when necessary in Si-82, SI 1805, SI 1830.



Replacement tube


PE5002
 Replacement tube of the peristaltic pumps.

Manufacturer of innovative
condensate management
and measuring solutions.

INsights

Expert advice on condensate
management

sauermann.co.uk/insights

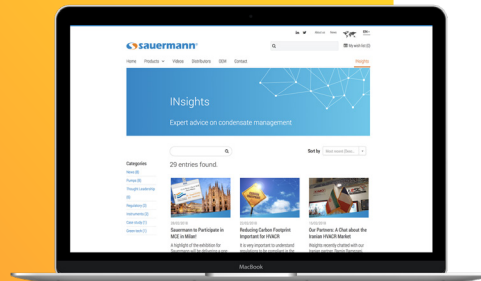

Condensate Pump Finder

The Right Pump is Just Clicks Away!



For any further information:
www.sauermann.co.uk

