


VAFS-6

The Packless VAFS-6 vibration absorber is for installation on suction and discharge lines with an outer diameter of $\frac{3}{4}$ in.

[← View all Vibration Absorbers](#)

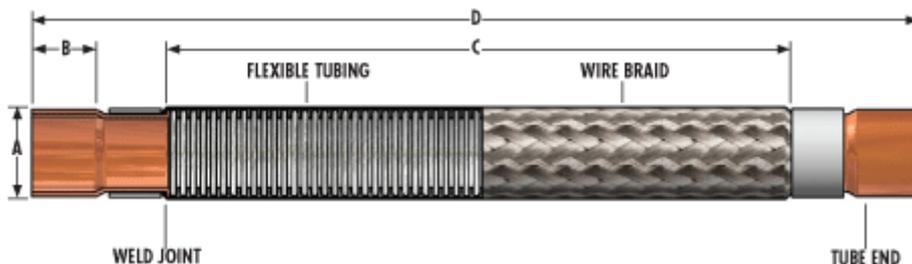

Print Page

Specifications

Model	VAFS-6	
UL Recognized Number	VAFS-6	
Tube Material	Stainless Steel	
Braid Material	Stainless Steel	
Ferrule Material	Stainless Steel	
Connection Material	Copper	
A - Connection Size (ID)	$\frac{3}{4}$ in	19.1 mm
B - Connection Length	$\frac{5}{8}$ in	15.9 mm
C - Tube Length	$7 \frac{7}{16}$ in	188.9 mm
D - Total Length	$10 \frac{1}{2}$ in	266.7 mm
Flexible Tube Size (ID)	$\frac{5}{8}$ in	15.9 mm
Working Pressure	650 psig	45 bar
Burst Pressure	3250 psig	224 bar