TOYO Duct and Fittings







TD Duct – Main Unit

Features;

•Made from high grade PolyVinyl Chloride (PVC) resin which has excellent durability and weather resistance.

·Slim, square design and various fittings will make any installation lovely and looks clean and professional.

Notes for usage;

• As the ducts do not have water proof, contact point on the wall, joint, screw hole etc... should be filled by caulking compound or putty.


•Not able to use where surface temperature beyond the range -20 to 60° C.

Model No.		Si	ze (mi	Package		
Model No.	Α	В	С	D	Length	Q'ty
TD-70	42	57	63	48	2,000	5pcs × 3c/s
TD-80	60	73	78	58	2,000	5pcs × 3c/s
TD-100	82	98	103	68	2,000	4pcs × 2c/s
TD-120	114	120	125	68	2,000	4pcs × 2c/s
TD-140	128	148	155	85	2,000	4pcs × 2c/s



DLW Duct Elbow 45°

-	Madal Na		Package		
Model No.	А	В	С	Q'ty	
	DLW-70	73	59	60	20
	DLW-80	86	73	69	20





DS Soffit Inlet

Model No.		Package			
Model No.	А	В	С	D	Q'ty
DS-80	107	86	120	139	20
DS-100	130	110	126	150	20
DS-120	159	136	135	159	10
DS-140	186	163	150	170	6



DIK	Vertical Duct Elbo	w Mini
		- ·

Model No.	5	Package		
wodel wo.	А	В	С	Q'ty
DIK-80	86	70	103	20





DL Duct Elbow

Model No.	Siz	Package		
Woder No.	Α	В	С	Q'ty
DL-70	73	59	100	20
DL-80	86	70	113	20
DL-100	110	78	157	12
DL-120	130	81	176	10
DL-140	163	98	220	6



DJ **Duct Joint**

Model No.	S	Package		
Model No.	Α	В	С	Q'ty
DJ-70	73	59	50	50
DJ-80	86	70	50	50
DJ-100	110	78	65	25
DJ-120	130	81	79	20
DJ-140	161	98	89	10



DK Vertical Duct Elbow

Model No.		Package		
Model No.	Α	В	С	Q'ty
DK-70	73	59	120	20
DK-80	86	70	120	20
DK-100	110	78	121	20
DK-120	129	85	130	6
DK-140	161	98	140	6



TOYO Duct Fittings

Size (mm)

С

197

211

225

260

291

D

97

111

145

164

197



DC **Wall Inlet Cover**

Model No.

DC-70

DC-80

DC-100

DC-120

DC-140



A

68

81

110

128

162

в


57

68

78

80

95



Е

66

82

90

110

131

Package

Q'ty


20

20

16


10


6



DHC / DHBC










Model No.		Package				
Woder No.	А	В	С	D	E	Q'ty
DHC-80	81	68	207	109	128	10
DHBC-80	81	68	228	155	128	10
Material : Po	lycarbor	nate				

DIC / DBC Wall Inlet Cap / Round Wall Inlet Cap








Model No.		Package				
Woder No.	Α	В	С	D	E	Q'ty
DIC-80	81	68	120	111	82	20
DBC-80	81	68	215	155	82	20
Material : Po	olycarbor	nate				

Duct - End Cap DE






For fitting end

20

Model No.		5	Size (mm	ize (mm)			
Woder No.	Α	В	С	D	E	Q'ty	
DE-70	73	59	94	52	35	20	
DE-80	86	70	95	52	45	20	








Size (mm) Package Model No. Q'ty В D Е А С DIS-70-80 81 63 75 85 50 68

Material : PolyVinyl Chloride (PVC)


Duct Tees DT





	Package			
Α	В	С	D	Q'ty
84	71	140	112	10
130	81	243	185	5
		A B 84 71	84 71 140	A B C D 84 71 140 112

DT-120 including two pcs reducer DR-120

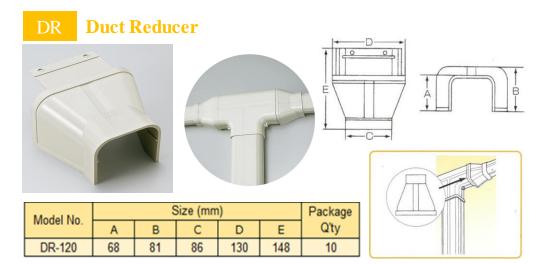

С

D


В


TOYO Duct Members














Model No.		Package			
Woder No.	А	В	С	D	Q'ty
DF-70S	59	50	633	75	20
DF-70L	59	50	1,200	75	15
DF-80	75	60	630	84	10
DF-80S	75	60	633	75	20
DF-80L	75	60	1,200	75	15
DF-100	95	65	780	78	8
DF-120	122	70	800	82	5
DF-140	140	85	918	86	4

Material : Polyethylene

Duct Support Bracket (for horizontal line set) DHK



DSS

When use long flexible duct DF-70L or DF-80L, Recommend to use this saddle to fix like below picture.




Model No.		Package							
woder no.	Α	В	С	D	Q'ty				
DSS-70	62	51	18	25	50				
DSS-80	79	61	18	25	50				
Material - Otaialana									

Material : Stainless

Flexible Saddle



Model No.	Q'ty (pc x bag)							
FS-10	10 × 100							
FSS-10 (incl.screws)	10 × 100							
Applicable Pipe diameter 386~556.								

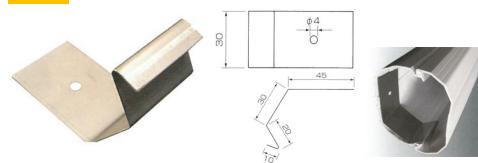


Bracket part made of SUS 304 to prevent duct deforming and falling of duct cover in horizontal line setting. Recommended usage interval : about 50cm in duct

Model Number	Q'ty
DHK-80	20/bag
Material : SUS 3	04

Wall Sleeve Hole Cap KH





Model No.		Size	(mm)		Adaptive Hole	Adaptive Wall	Package Q'ty			
model No.	Α	В	С	D	Size (mm)	Thickness (mm)				
KH-60	110	60	5	30	60~100¢	50~250	50			
Whony and white color are available for the cordination with wall color										

ble for the cordination with wall ury a

V	VC Wall S	Sleeve Cap) / Thir	N Vers	ion	WC]	F Lid		WP W	all Pipe	WKP	With	Flange	WFP	With Flange Flexible ver.
WC-60 / 65					0	WCF-60		M	-60 / 65	5	WKP-	60 / 65		WFP-60 / 65	
			5						-B-		c	B			
			<u> </u>	c≢		D	Model No.	Core Drill Diameter	A	Size (mn B	1) C	Package Q'ty			
	Model No.	Core Drill			(mm)		Package		WP-60	65ф	63	61	160	100	
		Diameter	Α	В	С	D	Q'ty		WP-65	70ф	69	67	200	50	
	WC-60	65ф	110	60	6	25	200		WKP-60	65ф	84	61	210	100	
	WC-65	70ф	110	65	5	28	200		WKP-65	70ф	89	66	210	100	
	WC-60U	65ф	85	58	2	26	200		WFP-60	65¢	84	63	230	100	
	WCF-60	-	76	-	1	8	200		WFP-65	70ф	92	68	230	100	

Color: Ivory

Color : Ivory

 $\cdot\, \text{WKP}$ and WFP has grooved cutmark